

STIER RATCHET LEVER HOIST

- Capacity ranges from 0.5t to 9t
- Up to 5t in a single strand
- Galvanized and tempered high tensile load chain according to DIN EN 818-7-T
- Robust and compact product
- Integrated freewheel chain guide
- Ergonomic handle, additional screw connection
- Non-slip hand wheel

FEATURES


USPs

BENEFITS

- Drop-forged load hook with a closed and fitted safety latch
- Allows easy free chaining and with selector level set at the middle position, pulling the load chain and hook becomes effortless
- High safety factor for the load chain
- Double guide rollers ensure higher resistance to inclined loading
- Pleasing aesthetics, rust-free design and long chain life
- Being light weigh makes it easier to change the operational set-up in terms of handling and installation
- The chain guide leads effectively the load chain into the sprocket wheel without any jamming or sticking
- The protected hand grip ensures the hand doesn't slip or you hurt yourself
- High operating efficiency and assured reliability

Redefining Material Handling. Since 1962

RATCHET LEVER HOIST

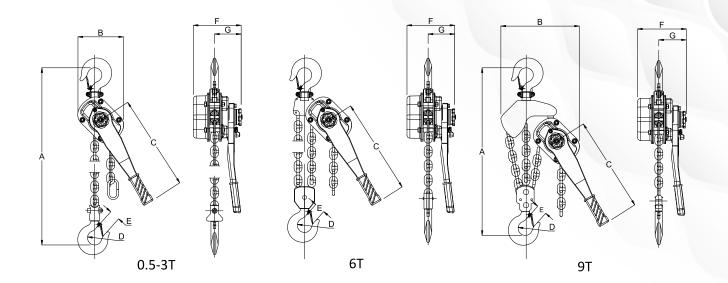

HHL/RLH Premium/20140201/V2	Capacity	t	0.75	1.5	3	6	9
	Standard Lift	m	1.5	1.5	1.5	1.5	1.5
	Min. headroom (A)	mm	330	400	520	640	795
	Lever force	daN	26	29	33	37	42
	Number of chain falls		1	1	1	2	3
	Chain size	mm	5.6X17	7.1X21	09X27	09X27	09X27
	B (Dimensions)	mm	132	145	199	230	338
	С	mm	278	378	388	388	388
	D	mm	35	42	50	53	67
	E	mm	27	33	40	42	53
	F	mm	148	173	200	200	200
	G	mm	87	99	112	112	112
	Weight with standard lift	kg	6.5	10.2	22	34	45
Ŧ	Lifting Height	kg	0.7	1.1	2.2	4.4	6.6

Note :- Due To Continuous development and improvement specification listed above may be changed without notice.

www.indef.com





Office No. 501-504, Shelton Cubix, Plot No. 87, Sector-15, CBD-Belapur, Navi Mumbai - 400 614, India.

enquire@indef.com

() +91 (22) 489-33303

🛛 🖸 🖸 in 🗌 🎔